

Thin Client Enclosure

Product Features

- Holds standard and wide screen 19" and 19" Wide LCD monitors
- Option for polyester-hard coated resistive touch screen
- Water and dust-proof
- 80W thermal management of LCD and thin client
- Dual internal fans with thin-fin heat exchanger plenum
- Aluminum heat transfer technology
- Wall/equipment mount

Shown with optional NEMA 4X keyboard (top right) and NEMA 12 keyboard (bottom right)




Specifications

Mechanical:

Size (W x H x D)	20.14 x 16.14 x 8.11 (inches) 511.5 x 410 x 205.9 (mm)
Shipping Weight	50 lbs 22.67 kg
Finish	Stainless – Polished 320 Grit CRS – Epoxy Powder Coat (Customer Specified)
Material	Stainless steel 304 - polished 320 grit Painted steel - epoxy powder coat
Rating	NEMA 4X/IP66
Temperature (Operating)	0° - 40° C 32° - 113° F
Extended	-20° to +50° C -12° to +122° F
Humidity	10 - 90% Non-Condensing
Maximum Wattage, LCD	30W

Thin Client Workstation Outline Drawing

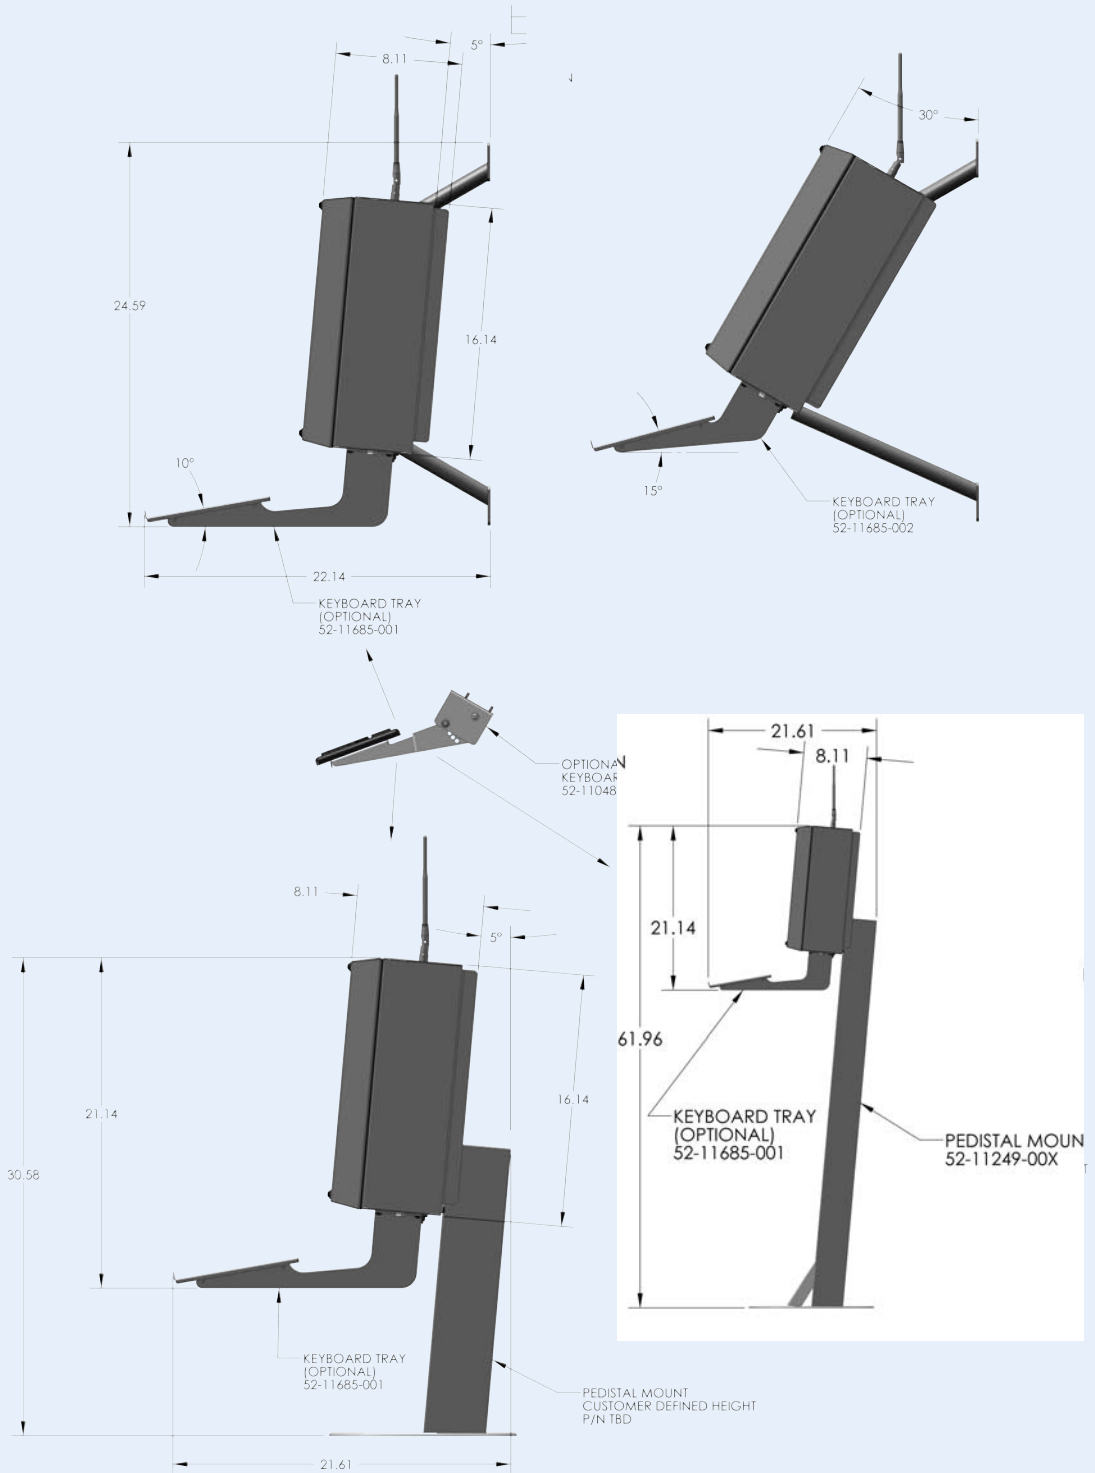

COMARK CORPORATION

93 West Street
Medfield, MA 02052

Toll Free 1-800-280-8522
Fax 508-359-2267
Local 508-359-8161

Specifications subject to
change without notice.
Contact COMARK for
current pricing.

www.comarkcorp.com

All brand names, trademarks
and registered trademarks
are the property of their
respective owners.