

## 32" Interactive Outdoor "All-In-One" Computer

### Features and Benefits

- 32" Wide Screen LCD
- 1366 x 768 Resolution
- 500 cd/m<sup>2</sup> Display
- Plastic Bezel
- Lightweight 5052 Aluminum Construction
- M Series Processor/Socket P
- Up to 4GB DDR RAM
- 10/100BT 1Gbit Ethernet Port
- 1 COM up to 3
- (4) USB Ports
- Windows® XP PRO/XP Embedded/Linux
- Panel Mount
- Projective Capacitive Touchscreen
- Temperature Rating 0° to +50°C



### Specifications


<b>LCD</b>	Viewable Screen Size	29.92 x 17.71	
	Panel Type	LCD Active Matrix	
	Maximum Resolution	1366 x 768	
	Brightness	500 cd/m <sup>2</sup>	
	Viewing Angle	± 178° Horizontal, ± 178° Vertical	
	Light Source	CCFL; 30,000 Hrs . Life	
	Frequency	Horizontal 30 - 60 KHz, Vertical 50 - 75 Hz	
	Colors	16.7 Million	
	Contrast Ratio	1200:1	
	Touchscreen	Projective Capacitive	
	<b>Mechanical</b>	Size (W x H x D)	33.44" x 21.43" x 5.50", (849.37 x 544.32 x 139.7mm)
Weight		62 lbs., (28.12 kilograms)	
Material		Aluminum	
Finish		Carbide Black w/Exterior Catalyst	
Color		Black	
Humidity		10% to 90% RH	
Temperature		0° to 50°C	
<b>Electrical</b>	Voltage	90-264VAC	
	Current	1.5A @ 115VAC	
	Power Consumption	160 Watts, maximum	
<b>Interface</b>	I/O Ports	KB, MS - PS/2 DIN (4) USB - Standard USB-A (3) COM - DB9P (2) LAN - Standard RJ45 (1) VGA (1) ACPI PB	
	Sound	Line In, Out, Mic, Stereo Jacks	
	Speakers	Dual Stereo 4 watt	
	<b>Processor</b>	Processor	M Series Processor, S478, Socket P
		CPU	Up to 2.4 GHz
		FSB	400 MHz up to 533 MHz
		Memory	Up to 1GB Main Memory, DDR400, DDR2
		Video	Integrated AGP Controller
		Sound	Integrated AC97 Audio
	<b>Peripherals</b>	LAN	Integrated 10/100BT LAN
Disk		(1) 2.5 or CF Disk up to 8 GB	
<b>Certification Options</b>	FCC, UL, CUL, CE		

**COMARK CORPORATION**

[www.comarkcorp.com](http://www.comarkcorp.com)

## 32" Interactive Outdoor "All-In-One" Computer

### 11343 Dimensional Drawing

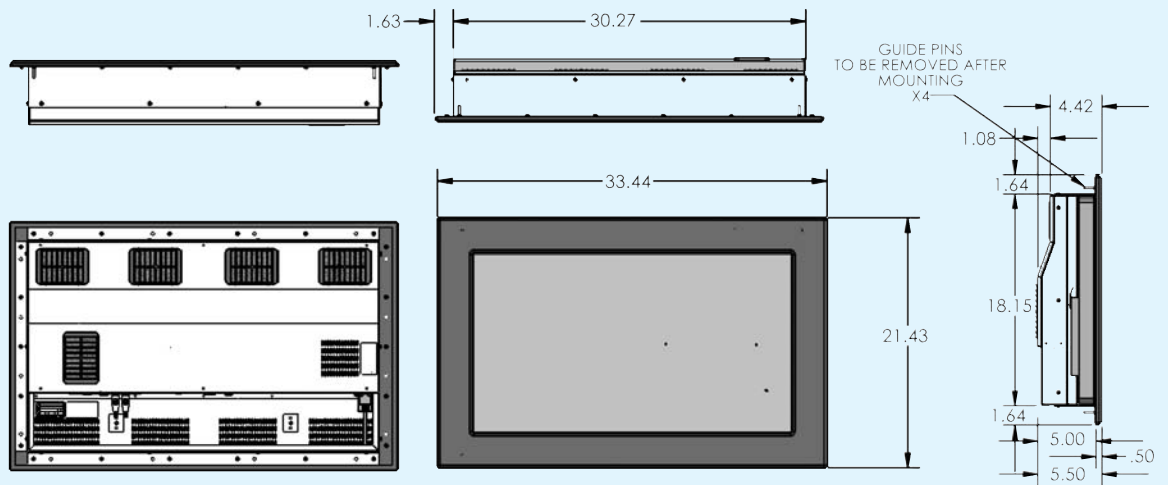

### 11343 Cutout Drawing

