

9400

# Industrial Workstation NEMA 12/4/4X Enclosure

## Factory Floor Automation Solution

The 9400 Series Industrial Workstation provides a superior platform for factory floor applications. The enclosure is constructed from rugged steel, has fully gasketed doors for NEMA 4X (IP65) protection from dust or leaks. Stainless Steel 304 finish is available for protection from corrosion or for food service applications. Numerous hardware, heating, cooling options are available for your specific application.

## Standard Features

- NEMA 4/12 - 14 Gauge, Cold Rolled Steel (CRS)
- NEMA 4X - 14 Gauge:
  - Cold Rolled Steel With Epoxy Powder Coat Paint
  - 304 Stainless Steel
- Closed Cell Foam Gaskets
- Front and Rear Full Door Access
- Latch Fasteners with Pad Lock (lock not included)
- Six Outlet Power-Surge Strip with Breaker
- Top/Bottom Entry Cable Ports  
Per Customer Requirements
- .25" Thick, Scratch Resistant Viewing Window
- 19" Samsung LCD
- 86 Key, NEMA 4X Keyboard
- (2) Front Access USB Ports

## Optional Features

- Custom Colors
- Casters
- UPS
- Slides
- Heaters
- Printer Tray
- CID1 or CID2  
Purge Systems
- (2) Adjustable Shelves
- Internally Mounted  
Chilled Water Cooling



### Adjustable for Computers and Peripheral Equipment

Accommodates desktop or mini tower based processors; a wide variety of printers and up to 21" diagonal displays on two adjustable shelves with optional slides.

## Specifications


Physical			
Size (H x W x D)	Air Cooled Unit	68" x 24" x 28"	(1727 x 610 x 711.2)mm
	Water Cooled Unit	72" x 24" x 28"	(1828 x 610 x 711.2)mm
Weight	CRS Enclosure	340 lbs. (154 kg.)	
	Stainless Steel	360 lbs. (163 kg.)	
Material	Metal/Finish	Cold Rolled Steel, Epoxy Powder Coat Paint	
		Stainless Steel, 304 Finish	
	Thickness	14 Gauge, .074" (1.88 mm)	
Color	Standard	Blue Powder Coat	
	Optional	Customer Specified	
Environmental			
Temperature	Operating	0 - 50°C (32° - 122°F)	
	Storage	-10° to +65°C (14° to 149°F)	
Shock	10G, 3 Axis, 11ms		
Vibration	1.5G, 3 Axis, 10-150Hz, .75mm		
Humidity	0 - 95% RHNC		
Altitude	Up to 10000 feet (3 km)		
Electrical			
Voltage	115/230V		
Frequency	50/60Hz		
Current	Up to 15 AMPS		
230V	Consult Comark		
Country Specific Requirement	Consult Comark		

**COMARK CORPORATION**  
**Engineered Solutions**

[www.comarkcorp.com](http://www.comarkcorp.com)  
**1-800-280-8522**

9400

**Dimensional Drawing**

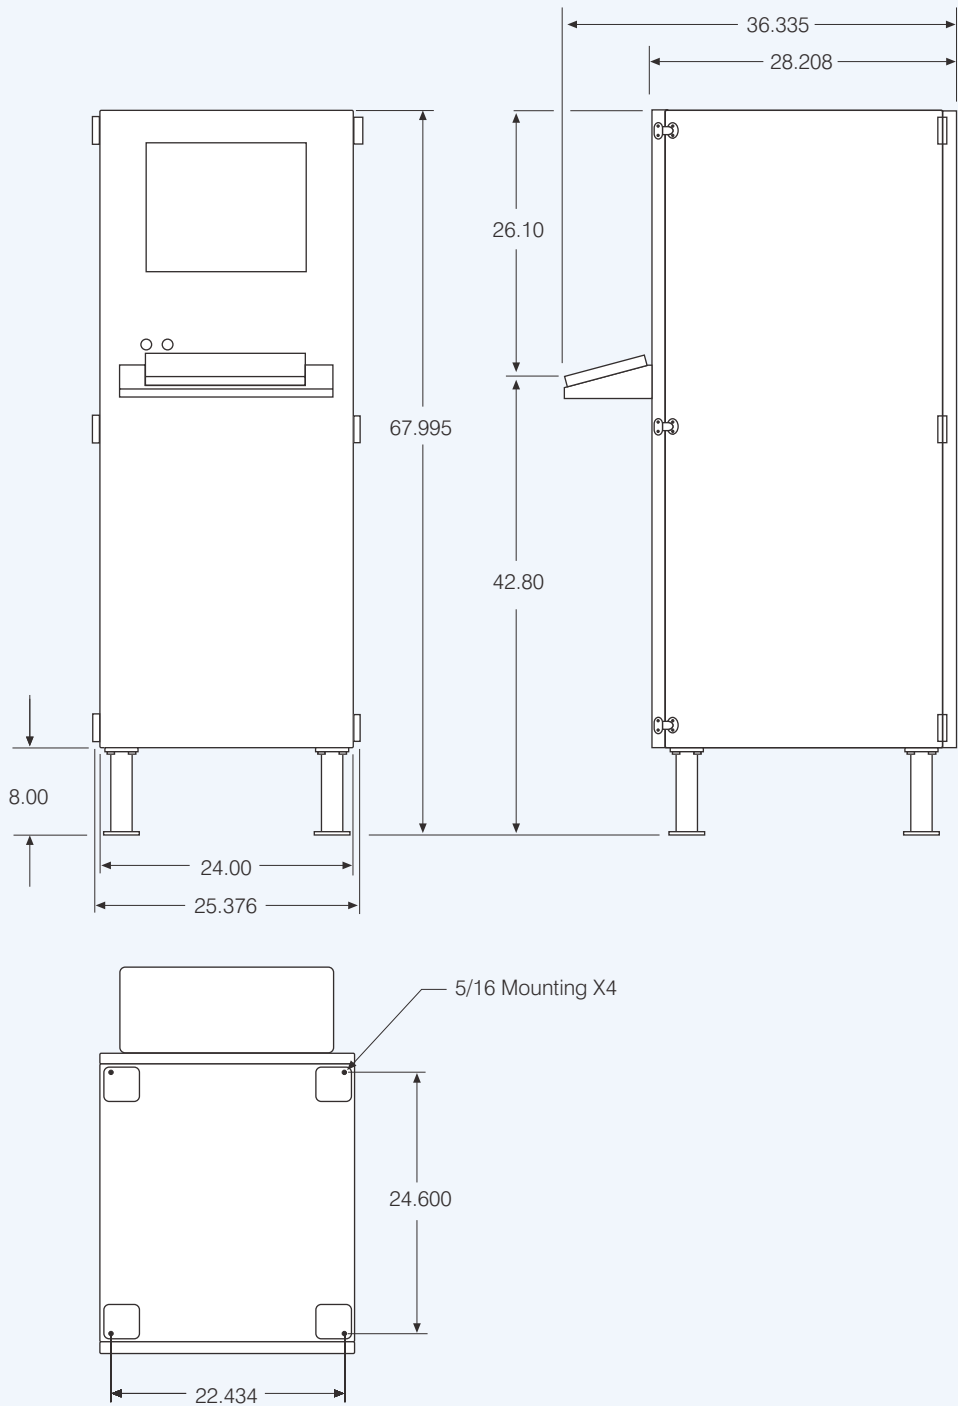

**COMARK CORPORATION**

[www.comarkcorp.com](http://www.comarkcorp.com)

93 West Street  
Medfield, MA 02052

Toll Free 1-800-280-8522  
Fax 508-359-2267  
Local 508-359-8161

Specifications subject to  
change without notice.  
Contact COMARK for  
current pricing.

All brand names, trademarks  
and registered trademarks  
are the property of their  
respective owners.