

## Multi-Touch II Outdoor Kiosk

### Suggested Applications

- Outdoor Sporting Venues
- Amusement Parks
- Automated Parking Facilities
- Tourist Information Directories
- Automated Security Guard

### Standard Features and Benefits

- Stationary or Mobile
- Indoor or Outdoor
- Multiple Computer Options
- Windows® XP PRO, XP Embedded or Linux
- Touchscreen - Projected Capacitive, I/R, SAW
- Temperature Rating 32° to 122°F (0°C to +50°C)
- Stereo Speakers

### Optional Features

- Wireless 802.11g or Wireless Broadband
- Extended Temperature Rating to -4°F (-20°C)

### Optional Equipment

- Stainless Steel Keyboard with Trackball
- Graphic Display: Dual LCD Displays or Custom Graphics
- Optional Wheels
- Battery Power (UPS)



### Specifications

<b>LCD Display</b>		<b>15" High-Bright</b>	<b>17" Standard</b>	<b>17" High-Bright</b>
Active Display Area		304 x 228	338 x 270	338 x 270
Resolution		1024 x 768	1280 x 1024	1280 x 1024
Brightness	Typical (without touch)	2200 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>	1000 cd/m <sup>2</sup>
Viewing Angle	Horizontal	±140°	±160°	±250°
	Vertical	±120°	±160°	±130°
Colors		16.2 Million	16.2 Million	16.2 Million
Contrast Ratio		500:1	1000:1	500:1
Backlight Life		30,000 Hours	30,000 Hours	30,000 Hours
Touchscreen	(optional)	SAW, Projective Capacitive, IR	SAW, Projective Capacitive, IR	SAW, Projective Capacitive, IR
<b>Mechanical</b>				
Size (w x h x d)	Inch	20" x 56.3" x 18"	20" x 56.3" x 18"	20" x 56.3" x 18"
	Metric	508 x 1430 x 457	508 x 1430 x 457	508 x 1430 x 457
Weight		135 lbs. (61.23 kg)	135 lbs. (61.23 kg)	135 lbs. (61.23 kg)
	On Pallet	165 lbs. (74.84 kg)	165 lbs. (74.84 kg)	165 lbs. (74.84 kg)
Material		Cold Rolled Steel	Cold Rolled Steel	Cold Rolled Steel
Finish		Water Bake	Water Bake	Water Bake
Color		Custom (consult factory)	Custom (consult factory)	Custom (consult factory)
Relative Humidity		10% to 90%	10% to 90%	10% to 90%
Temperature (operating)		0° - 50° C (32° - 122° F)	0° - 50° C (32° - 122° F)	0° - 50° C (32° - 122° F)
	(extended)	-20° with Extended Temperature Option		
<b>Electrical</b>				
Voltage		115/230 VAC	115/230 VAC	115/230 VAC
Current		2A @ 115 V	2A @ 115 VAC	2A @ 115 VAC
Power Consumption		250 Watts maximum	250 Watts maximum	250 Watts maximum
<b>Interface</b>				
I/O Ports		Keyboard, Mouse, up to 6 USB, (1) up to 4 Com, 10/100BT LAN-RJ45, (1) LPT, ACPI PB		

Specifications continued on back

**COMARK CORPORATION**

[www.comarkcorp.com](http://www.comarkcorp.com)

Multi-Touch ds  
Last Updated:  
12/02/09

93 West Street  
Medfield, MA 02052

Toll Free 1-800-280-8522  
Fax 508-359-2267  
Local 508-359-8161


Specifications subject to  
change without notice.  
Contact COMARK for  
current pricing.

All brand names, trademarks  
and registered trademarks  
are the property of their  
respective owners.

## Specifications (Continued)

Sound	Line In, Out, Mic, Stereo Jack
Stereo	Dual Stereo 4 watt, 8 ohm
<b>Processor</b>	
CPU	Pentium M Series or Socket P, up to 2.2 GHz
FSB	400 MHz up to 800/533 MHz
Memory	Up to (4) Gb main memory, DDR2
Video	Integrated AGP controller
Sound	Integrated AC97 audio
LAN	Integrated 10/100/1000 BT LAN
Expansion	(1) PCI Slot, (1) PCI Expansion Slot
<b>Peripherals</b>	
	Thermal Printer
	Card Reader/Dispenser
	Cash Acceptor
	Coin Acceptor
	Biometric Reader
	RFID Reader
	Scanner
	Passport Reader
	Web cam
<b>Options</b>	
	Door Mounted Dell/HP System (Size requirements needed)

## Multi-Touch<sup>2</sup> Outline Drawing

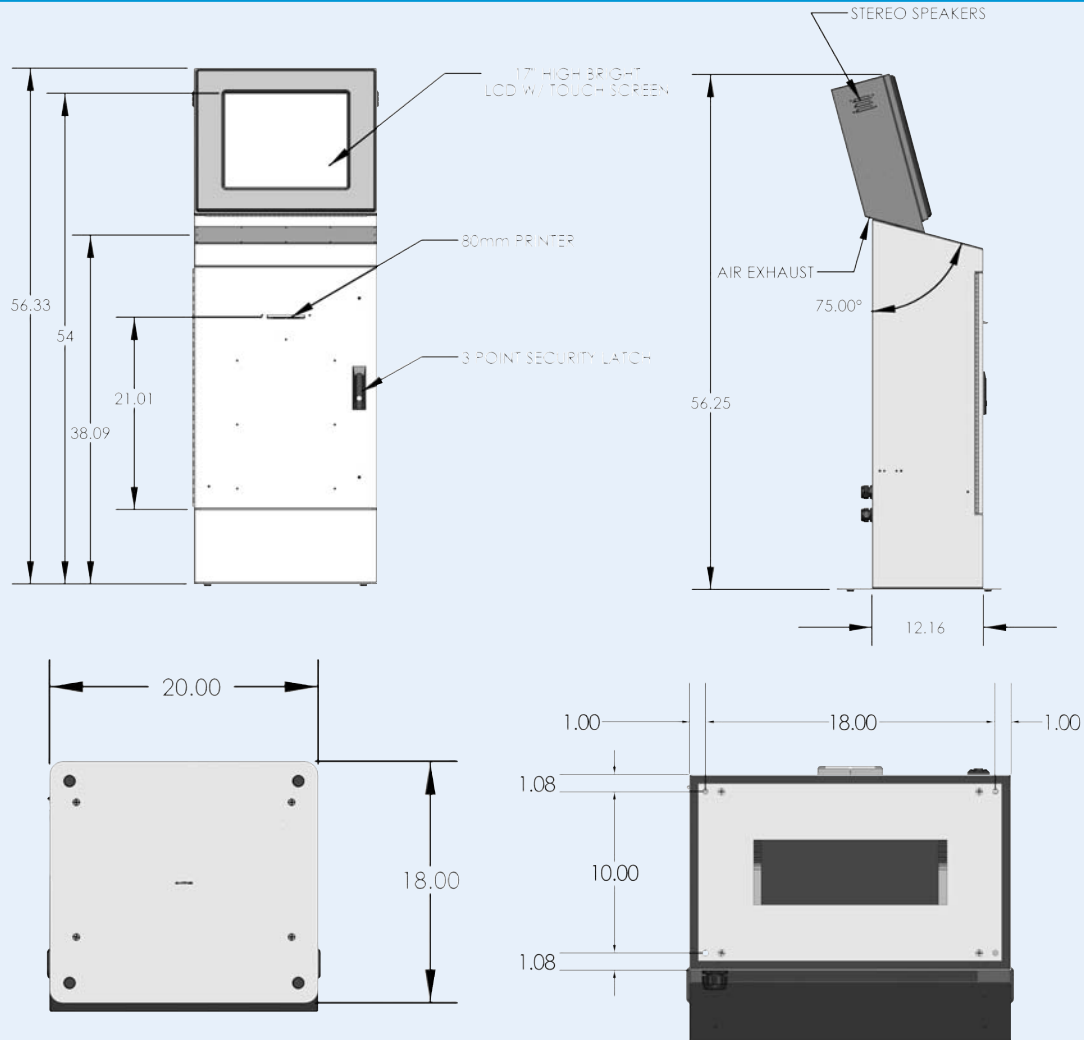

Base plate for mobile kiosk - rear electrical input (customer defined)

No base plate - bottom electrical input