

Multi-Touch II Outdoor Kiosk

Suggested Applications

- Outdoor Sporting Venues
- Amusement Parks
- Automated Parking Facilities
- Tourist Information Directories
- Automated Security Guard

Standard Features and Benefits

- Stationary or Mobile
- Indoor or Outdoor
- Multiple Computer Options
- Windows® XP PRO, XP Embedded or Linux
- Touchscreen - Projected Capacitive, I/R, SAW
- Temperature Rating 32° to 122°F (0°C to +50°C)
- Stereo Speakers

Optional Features

- Wireless 802.11g or Wireless Broadband
- Extended Temperature Rating to -4°F (-20°C)

Optional Equipment

- Stainless Steel Keyboard with Trackball
- Graphic Display: Dual LCD Displays or Custom Graphics
- Optional Wheels
- Battery Power (UPS)



Specifications

LCD Display	15" High-Bright (Outdoor)	17" Standard (Indoor)
Active Display Area	304 x 228	338 x 270
Resolution	1024 x 768	1280 x 1024
Brightness (without touch)	Typical 1000 cd/m ²	300 cd/m ²
Viewing Angle	±140°	±160°
Horizontal	±140°	±160°
Vertical	±140°	±160°
Colors	16.7 Million	16.2 Million
Contrast Ratio	500:1	1000:1
Backlight Life	30,000 Hours	30,000 Hours
Touchscreen (optional)	SAW, Projective Capacitive, IR	SAW, Projective Capacitive, IR
Mechanical		
Size (w x h x d)	Inch 20" x 56.3" x 18"	20" x 56.3" x 18"
	Metric 508 x 1430 x 457	508 x 1430 x 457
Weight	135 lbs. (61.23 kg)	135 lbs. (61.23 kg)
On Pallet	165 lbs. (74.84 kg)	165 lbs. (74.84 kg)
Material	Cold Rolled Steel	Cold Rolled Steel
Finish	Water Bake	Water Bake
Color	Custom (consult factory)	Custom (consult factory)
Relative Humidity	10% to 90%	10% to 90%
Temperature (operating)	0° - 50° C (32° - 122° F)	0° - 50° C (32° - 122° F)
(extended)	-20° with Extended Temperature Option	
Electrical		
Voltage	115/230 VAC	115/230 VAC
Current	2A @ 115 V	2A @ 115 VAC
Power Consumption	250 Watts maximum	250 Watts maximum

Specifications continued on back

COMARK CORPORATION

www.comarkcorp.com

Multi-Touch ds
Last Updated:
09/17/10

93 West Street
Medfield, MA 02052

Toll Free 1-800-280-8522
Fax 508-359-2267
Local 508-359-8161

Specifications subject to
change without notice.
Contact COMARK for
current pricing.

All brand names, trademarks
and registered trademarks
are the property of their
respective owners.

Specifications (Continued)

Interface

I/O Ports	Keyboard, Mouse, up to 6 USB, (1) up to 4 Com, 10/100BT LAN-RJ45, (1) LPT, ACPI PB
Sound	Line In, Out, Mic, Stereo Jack
Stereo	Dual Stereo 4 watt, 8 ohm


Processor

CPU	Socket P, up to 2.2 GHz or Intel ATOM
FSB	400 MHz up to 800/533 MHz
Memory	Up to (4) Gb main memory, DDR2
Video	Integrated AGP controller
Sound	Integrated AC97 audio
LAN	Integrated 10/100/1000 BT LAN
Expansion	(1) PCI Slot, (1) PCI Expansion Slot

Peripherals

- Thermal Printer
- Card Reader/Dispenser
- Cash Acceptor
- Coin Acceptor
- Biometric Reader
- RFID Reader
- Scanner
- Passport Reader
- Web cam

Multi-Touch² Outline Drawing

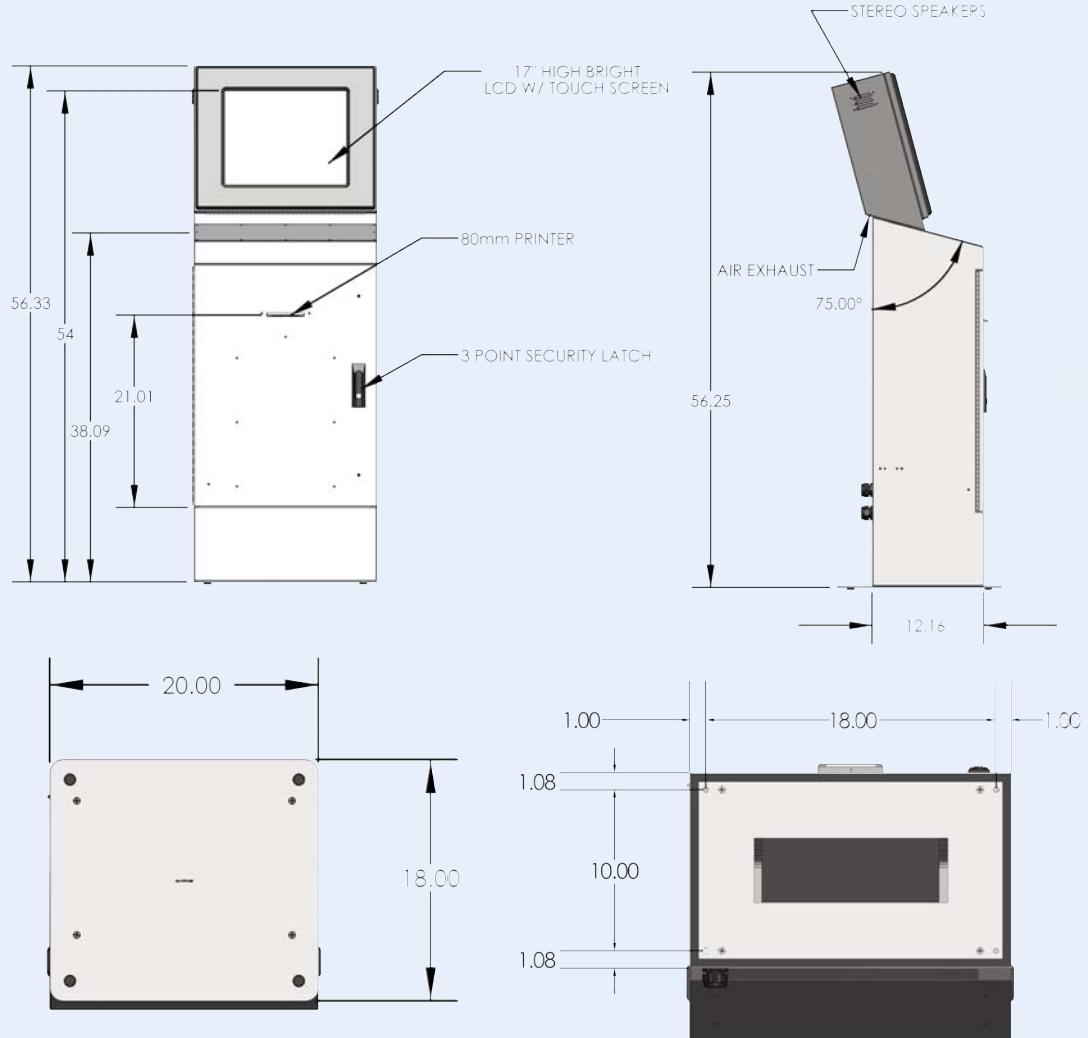

Base plate for mobile kiosk - rear electrical input (customer defined)

No base plate - bottom electrical input